

C-85 & C-95 Control Panel

Digital Timer Instructions

The C-85 & C-95 will turn the unit ON or OFF with the **Pump Timer** only. To turn your Kasco lights ON, both the **Pump Timer** and the **Light Timer** must be ON. The lights will turn OFF when either the **Pump Timer** or the **Light Timer** is turned OFF.


CLOCK ADJUMENT / SET TIMER

1. Press and hold the CLOCK button.
2. Press HOUR or MIN to advance the clock time.

PROGRAM TIMER - ON/OFF TIMES

This control panel allows you to set up to 16 automatic ON/OFF cycles. Automatic cycles can be set for both the **Pump Timer** and the **Light Timer**.

1. Press the TIMER button to display "1^{ON} --:--" on the screen.
2. Press HOUR or MIN to set the time for the first ON cycle.
3. Press the TIMER button again to display "1^{OFF} --:--" on the screen.
4. Press HOUR or MIN to set the time for the first OFF cycle.
 - Repeat steps 1 - 4 to set additional ON/OFF cycles.
5. When you are finished programming, press CLOCK to return to the main screen. The timers will now run the cycles as programmed.
6. To rotate through all 16 cycles, press TIMER repeatedly. You can exit by pressing CLOCK at any time.

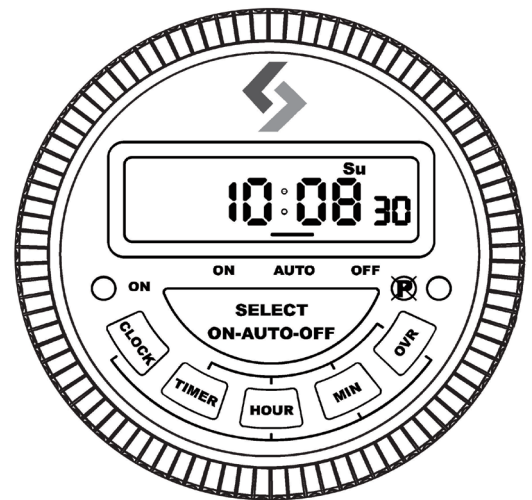

SELECT ON - AUTO - OFF BUTTON

1. When the Timer output is ON and in AUTO mode, pressing the SELECT button will switch the output to OFF.
2. Press SELECT again to return to AUTO mode and the output will remain OFF until the next programmed ON cycle.
3. When the Timer output is OFF and in AUTO mode, pressing the SELECT button will switch the output to ON.
4. Press SELECT again to return to AUTO mode and the output will remain ON until the next programmed OFF cycle.

OVR OVERRIDE BUTTON

1. Press the OVR button to immediately switch the timer output to ON or OFF (opposite of the current state). The timer will resume automatic operation on the next opposite cycle.
2. Press the reset button (shown below) to clear all stored data.

