


RGBW18 & W25 UNIVERSAL BRACKET INSTRUCTIONS

Kit 593000K


PARTS INCLUDED

ID	Description	Qty	Part No.
A	1/4"-20 x 2-1/2" hex screw	1	345048
B	1/4" fender washer	1	144114
C	1/4"-20 x 3/4" hex screw	1	840539
D	Universal mounting bracket	1	345060
E	1/4", 5/8 O.D. flat washer	1	258476
F	1/4" split lock washer	2	840537
G	1/4"-20 hex nut	2	840536

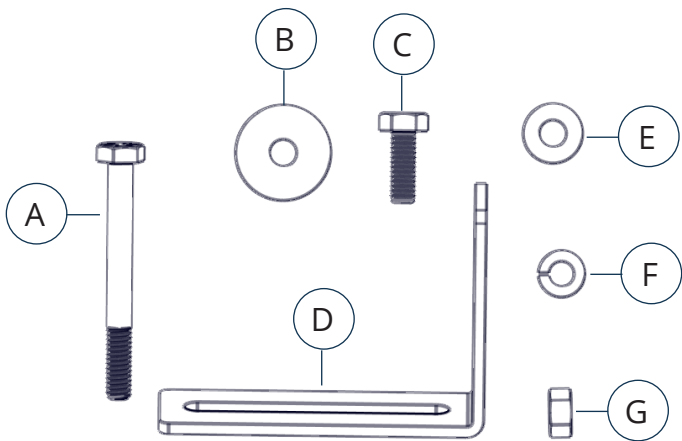

Horizontal Installation

- 1 Complete steps 1-4 in the RGBW18 or W25 Light Kit manual.
- 2 Use 1/4"-20 x 3/4" hex screws (C), flat washers (E), lock washers (F), and hex nut (G) as shown below to secure each float bracket to the universal mounting bracket (D).
Use 1/4"-20 x 2-1/2" hex screw (A), fender washer (B), lock washer (F), and hex nut (G) to secure the universal bracket to the float.

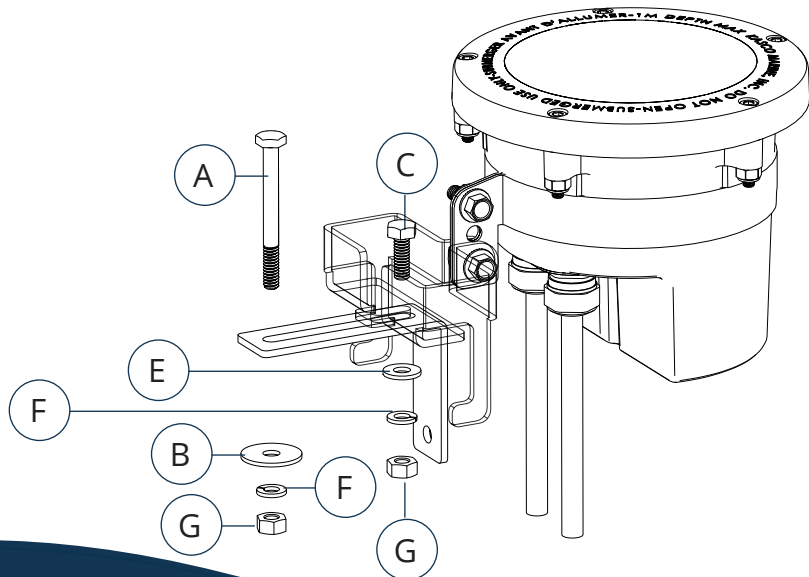


RGBW18 & W25 UNIVERSAL BRACKET INSTRUCTIONS

Vertical Installation

- 1 Complete steps 1-4 in the RGBW18 or W25 Light Kit manual.
- 2 Use 1/4"-20 x 3/4" hex screws (C), flat washers (E), lock washers (F), and hex nut (G) as shown below to secure each float bracket to the universal mounting bracket (D).

Use your existing float screws and the slot in the universal mount bracket to secure it to the float.

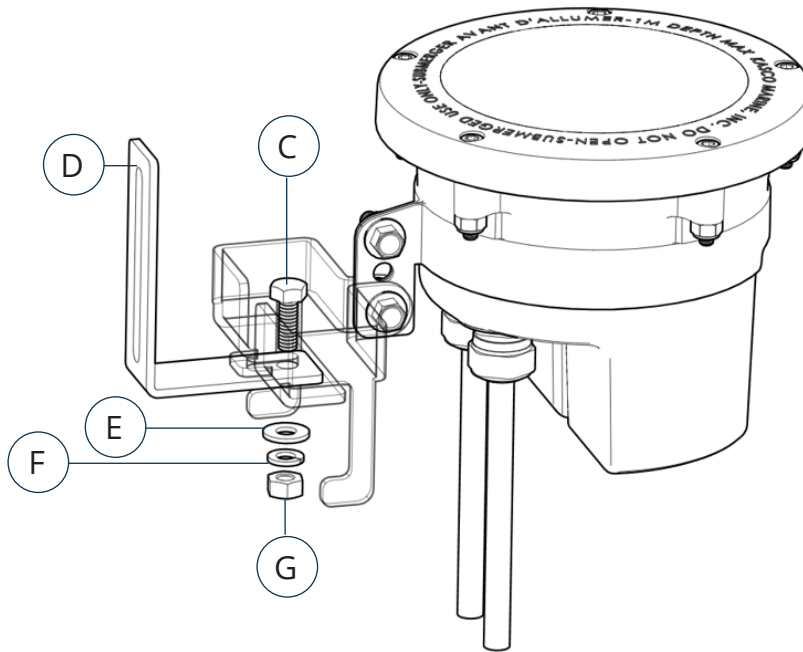

NOTE Repeat for remaining fixtures and the control fixture if securing an RGBW18 Light Kit. Ensure fixtures are evenly spaced around the float. The control fixture can be attached to any open recess and may be off centered. Adjust the angle of the lights if desired, being sure to use the same angle for all fixtures. Cable ties should be used to attach fixture cords to the float to avoid cuts or damages to the cords. Upon installation of the assembled unit, connect the light kit to a field-installed GFCI-protected outlet and/or control panel. **Remember: fixtures MUST be properly submerged (to mark on housing) to avoid overheating.**