


Quick Facts	
<p>Complete Package Includes:</p> <ul style="list-style-type: none"> • Motor Unit • Industrial Mount Kit • UL, CSA & NEC Approved Underwater Rated Cable 	<ul style="list-style-type: none"> • Total Package Listed by ETL to UL/CSA Standards • Salt Water Compatible • Packaged for Convenient Shipping
<p style="text-align: center;">Motor Unit</p> <ul style="list-style-type: none"> • 2HP, Voltage Operating Range of 208-240V, Single Phase • 1750 RPM • Oil Cooled • Continuous Duty Rated • 17mm Top and 20mm Bottom Bearings • Thermal Overload Protection • Fully Unitized Heavy-Duty Carbon Ceramic Mechanical Seal • Series 300 Austenitic Stainless-Steel Can • Engineering Grade Thermoplastic Top • Sacrificial Zinc Anode • Custom Engineered UV Resistant Thermoplastic 3-Blade Propeller • Coated, Stainless Steel Cage 	<p style="text-align: center;">Power Cable</p> <ul style="list-style-type: none"> • UL, CSA & NEC Approved Underwater Rated Cable • 3 Wire (L, N, G) • Quick Disconnect standard on 12 AWG & Larger Cords, & is optional on smaller gauge cords • Stainless Steel Strain Relief on 12 AWG & Larger Cords • 6' Flex Sleeving Protection • Optional Flex Sleeving for entire cord length available
<p style="text-align: center;">Optional Control Panel</p> <ul style="list-style-type: none"> • UL 508 Listed • UL Type 3r/4x Thermoplastic Enclosure • 20 Amp Breaker • GFCI Protection with 5ma Trip Level • 24 Hour Mechanical Aerator Timer • Surge Protector • 4 Wire Power Required (L1, L2, N, G) 	<p style="text-align: center;">Industrial Dock Mount - CID</p> <ul style="list-style-type: none"> • Complete 300 Series Stainless Steel Construction • Angling options for both in and out of water parts • User supplies 1.5" pipe, up to 10' long

Model #	HP	Cord Length (Feet)	Cord Gauge*	Voltage/Phase/Hz	Running Amps	Lock Rotor Amps	Thrust (Lbs)	Min Depth of Operation (Feet)**	Number of Boxes
8400CID050	2	50	14/3	208-240V 1/60	9.9	40	72	4	2
8400CID100		100	12/3						3
8400CID150		150	12/3						3
8400CID200		200	12/3						3
8400CID250		250	12/3						3
8400CID300		300	10/3						3
8400CID400		400	8/3						3
8400CID500		500	8/3						3

*12AW & larger cords include quick disconnect and stainless steel strain relief.

**Will operate in less depth, but may cause bottom disturbance

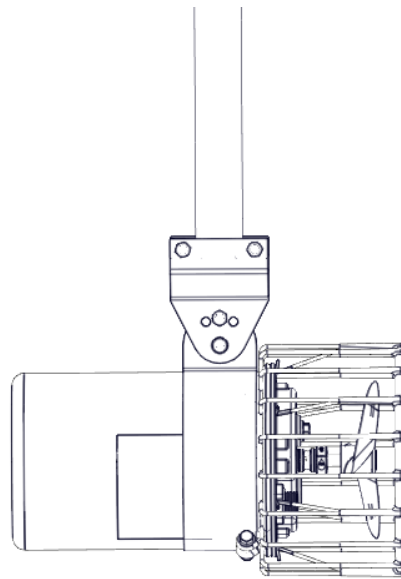

CID unit with Industrial Mount