

AQUATICLEAR

Kasco®

MOVING WATER FORWARD, SINCE 1968

AQUATICLEAR

This clog-resistant circulator produces water movement to keep docks, marinas, canals, shorelines, and other areas clear of floating weeds, algae, and debris. With our revolutionary Clean Current Technology™ (patent pending), AquatiClear features a crown-like composite prop guard allowing for continuous operation and less maintenance.

kascomarine.com




Contact us today to learn more | 715.262.4488 | sales@kascomarine.com

MOUNTING OPTIONS

HORIZONTAL FLOAT


Secure to the shore with three ropes and tie-down loops. Three angles of orientation directs flow to a desired area. Carries a 3-year warranty.

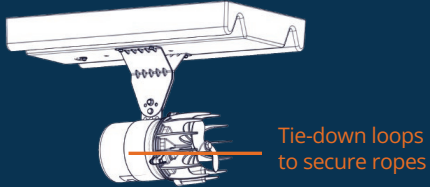

UNIVERSAL MOUNT

Mount to docks or similar structures and adjust angle and depth. Adjust rotation with the Simple Swivel bracket (patent pending). Mount includes lifetime warranty.

Kasco U-bolt Kits can be used in addition to dock mount kits and allow flexible installation without needing to drill into a structure. Purchased separately.

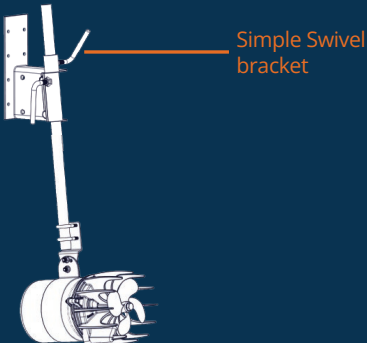

POWERFUL MIXING

Using a 3/4HP unit in just 30 minutes, dye is completely mixed throughout this 6 ft. deep, 800,000 gallon pond.

BEFORE MIXING



AFTER MIXING



AQUATICLEAR

- 120V and 208-240V options
- Built with long lasting internal components
- External metal and hardware are stainless steel and protected by a sacrificial anode
- Complete packages are ETL Listed to UL and CSA standards
- Includes motor unit, power cord, mounting option, and optional control panel



HP 1/2, 3/4, & 1HP
AVAILABLE



Shallow Water Install Kit

With the Shallow Water Install Kit, AquatiClear can be installed in shallower water without disrupting the lake or pond bottom and without creating a loud suction sound (ventilation). Kits are purchased separately.

AquatiClear Packages

MODEL	SIZE (HP)	VOLT(V)	PHASE	AMPS	THRUST (LBS)	OPTIONAL CONTROL PANEL
UNIT ONLY PACKAGES - NO MOUNT						
2400C	1/2	120	1	5.4	30	C-25
3400C	3/4	120	1	6.6	36	C-25
3400HC	3/4	208-240	1	3.1	36	C-220
4400C	1	120	1	9.1	41	C-25
4400HC	1	208-240	1	4.5	41	C-220
HORIZONTAL FLOAT PACKAGES						
2400CFM	1/2	120	1	5.4	30	C-25
3400CFM	3/4	120	1	6.6	36	C-25
3400HCFM	3/4	208-240	1	3.1	36	C-220
4400CFM	1	120	1	9.1	41	C-25
4400HCFM	1	208-240	1	4.5	41	C-220
UNIVERSAL MOUNT PACKAGES (CUSTOMER MUST SUPPLY PIPE)						
2400CDM	1/2	120	1	5.4	30	C-25
3400CDM	3/4	120	1	6.6	36	C-25
3400HCDM	3/4	208-240	1	3.1	36	C-220
4400CDM	1	120	1	9.1	41	C-25
4400HCDM	1	208-240	1	4.5	41	C-220

Product Notes:

1. Cord lengths available in various lengths from 25 ft. - 400 ft., according to HP and voltage. Call Kasco for details.
2. Optional control panels allow timing to be managed from shore.
3. Without the Shallow Water Install Kit, install AquatiClear 1.5 ft. or more below the surface to prevent audible ventilation.
4. Do not direct water flow downward as it could disturb bottom sediment. Check for local guidelines.