

# CertiSafe™ SUSPENDED MOUNT

## OVERVIEW


- Suspended mounts are vertically oriented and place the mixer at a chosen depth within the water column.
- Designed for elevated or standpipe tanks.
- Easy installation in full or empty tank.

## INCLUDED

- Stainless stretcher bar(s) with hardware
- 316 stainless chains
- Stainless tank penetration for power cord
- Stainless tank penetration hardware to suspend cable support and chains

## REQUIRED

- Electrical service to exterior junction box

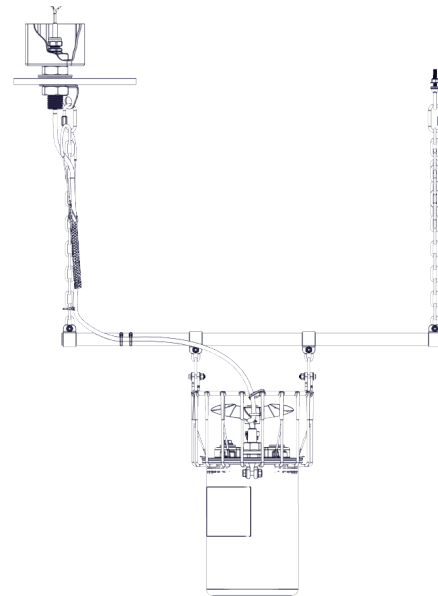

Certified to  
NSF/ANSI/CAN 61  
& 372

	SM-100	SM-100 + ASM-100 accessory	SM-50
Recommended unit size	2400C61 3400C61 4400C61	2400C61 3400C61 4400C61	2400C61 3400C61
Placement within the tank	Positions the mixer between 25 ft. and 50 ft. deep	Positions the mixer between 25 ft. and 50 ft. deep and moves the tank roof anchor points closer together	Positions the mixer at a depth of 25 ft. or less
Chain length	2 x 50 ft.	2 x 50 ft.	2 x 25 ft.
Stretcher bar(s)	1 x 60 in.	2 x 60 in.	1 x 30 in.

