




SMALL 50 HZ EJ SERIES FOUNTAIN

OVERVIEW

- Complete package includes motor unit, float with screens, mooring lines, cable, four interchangeable nozzles.
- Rubber 10m Power Cord or 1m Stub Cord
- CE Marked
- Intake near surface allows for shallow operation
- Saltwater compatible
- Packaged for convenient shipping
- Optional lighting available

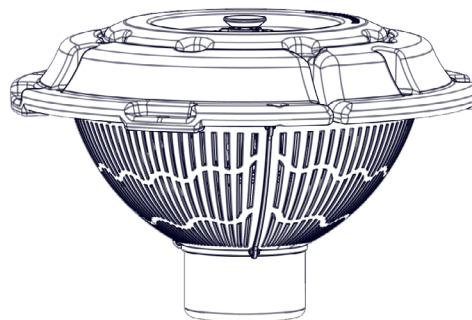

FLOAT

- UV-resistant polyethylene
- Single-piece float
- Protective coated 300 series stainless steel hardware
- Thermoplastic protective bottom screen
- Two 15m braided mooring ropes

FOUNTAIN COMPONENTS

- Custom thermoplastic impeller
- UV-resistant thermoplastic cone and fountain housing
- Series 300 stainless steel hardware
- Four thermoplastic nozzles (five patterns)
- Thermoplastic baseplate and housing
- Twist on/off nozzles for easy pattern changes

POWER CABLE

- 10m or 1m stub cord
- Rubber jacket, 3-conductor power cord with earth conductor
- Potted quick disconnect and stainless steel strain relief standard on all stub cords
- Flex sleeve cord protection

MOTOR UNIT

- 1/2 or 3/4HP, 230V single phase
- 1450 RPM
- Oil cooled
- Continuous duty rated
- Long-life bearings
- Thermal overload protection
- Fully unitized heavy-duty carbon-ceramic mechanical seal
- Series 300 stainless steel can
- Engineering grade thermoplastic top
- Sacrificial anode installed on 316 stainless shaft

OPTIONAL LIGHTS

- 230V, 50Hz compatible
- Options include:
 - Durable bronze housing with white halogen lights
 - Ultrasonic welded watertight composite housing with 5 colored lenses
- Includes light fixtures and stub cord



SMALL 50 HZ EJ SERIES FOUNTAIN

OVERVIEW


Model	HP	Voltage / Phase / Hz	Amperage	Locked Rotor Amps	Suggested Pond Size (m ²)	Min. Depth of Operation
2400EJF	1/2	230 / 1 / 50	2.2	5.3	1,000	38cm
3400EJF	3/4	230 / 1 / 50	3.5	9	1,350	45cm

WIRE SIZE

	Cord Length			
	10m	30m	60m	90m
2400EJ	1.5mm ²	1.5mm ²	2.5mm ²	2.5mm ²
3400EJ	1.5mm ²	1.5mm ²	2.5mm ²	2.5mm ²
4400EJ	1.5mm ²	1.5mm ²	2.5mm ²	4mm ²




INCLUDED PATTERNS



Willow

Model	Height	Width
2400	1.6m	5.2m
3400	1.9m	5.8m




Birch

Model	Height	Width
2400	1.7m	1.5m
3400	2.1m	2m




Sequoia

Model	Height	Width
2400	3.2m	2.4m
3400	3.5m	2.4m

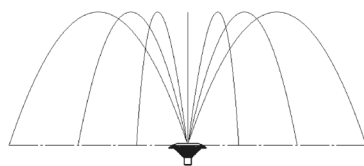

Cypress

Model	Height	Width
2400	1.8m	4.5m
3400	2.1m	5.5m

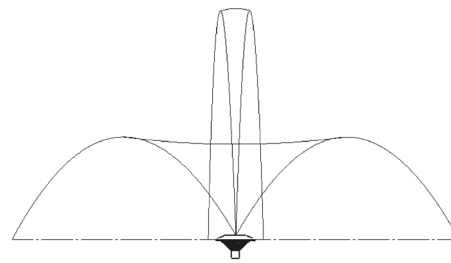

Linden

Model	Height	Width
2400	2.3m	6.7m
3400	2.7m	8.5m



NOTE For additional patterns, ask about Premium nozzles.

Kasco[®]