




WATERGLOW LIGHTING W25

OVERVIEW

- Daisy-chained, high-impact resistant polycarbonate fixtures
- Stainless steel mounting brackets and hardware
- Power cord quick disconnect
- Saltwater compatible
- 2-, 3-, or 4-fixture kits standard, with standard cord lengths up to 500 feet
- 3-year warranty

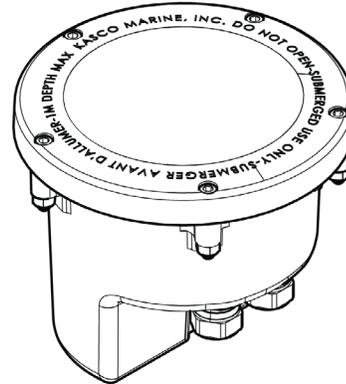

FIXTURES

- 120Vac, single-phase, 60Hz power
- High-impact polycarbonate housing
- Integrated Fresnel optic
- Fully potted cord entry with threaded strain relief cord grips
- Clear polycarbonate impact-resistant lens with o-ringed sealing surface
- 25-watt class II LED driver in each fixture
- Built-in thermal overload protection

MOUNTING BRACKETS

- Stainless steel mounting bracket
- Stainless steel hardware
- Easily adjust fixture angle and height
- Universal adapter brackets available for non-Kasco brand floating fountains

SNAP-ON LIGHT CLIPS

- Molded thermoplastic attachment clips
- Easily snap onto light brackets and then onto molded float locations
- Allow for easy installation and removal of lights on Kasco floats

POWER CABLE

- 3-conductor UL, CSA rated cable
- Flex sleeving protection for each fixture and stub cord
- Quick disconnect standard on main power cord

ALL MODELS

- 120Vac / single phase / 60 Hz
- Maximum input watts per fixture: 28
- Average lumens per fixture: 3,569
- 4,000 Kelvin

WATERGLOW LIGHTING

W25

Model	Cord Length (ft.)	Cord AWG/Wires	Fixtures	Kit Wattage (Max)	Suggested HP Sizes	
					Fountains	Surface Aerators*
LED2W25-050	50	16/3	2	56	1/2, 3/4, 1	1/2, 3/4
LED2W25-100	100	16/3	2	56	1/2, 3/4, 1	1/2, 3/4
LED2W25-150	150	16/3	2	56	1/2, 3/4, 1	1/2, 3/4
LED2W25-200	200	16/3	2	56	1/2, 3/4, 1	1/2, 3/4
LED2W25-250	250	16/3	2	56	1/2, 3/4, 1	1/2, 3/4
LED2W25-300	300	16/3	2	56	1/2, 3/4, 1	1/2, 3/4
LED2W25-400	400	16/3	2	56	1/2, 3/4, 1	1/2, 3/4
LED2W25-500	500	16/3	2	56	1/2, 3/4, 1	1/2, 3/4
LED3W25-050	50	16/3	3	84	1/2, 3/4, 1, 2, 3, 5	1/2, 3/4, 1, 2, 3
LED3W25-100	100	16/3	3	84	1/2, 3/4, 1, 2, 3, 5	1/2, 3/4, 1, 2, 3
LED3W25-150	150	16/3	3	84	1/2, 3/4, 1, 2, 3, 5	1/2, 3/4, 1, 2, 3
LED3W25-200	200	16/3	3	84	1/2, 3/4, 1, 2, 3, 5	1/2, 3/4, 1, 2, 3
LED3W25-250	250	16/3	3	84	1/2, 3/4, 1, 2, 3, 5	1/2, 3/4, 1, 2, 3
LED3W25-300	300	16/3	3	84	1/2, 3/4, 1, 2, 3, 5	1/2, 3/4, 1, 2, 3
LED3W25-400	400	16/3	3	84	1/2, 3/4, 1, 2, 3, 5	1/2, 3/4, 1, 2, 3
LED3W25-500	500	16/3	3	84	1/2, 3/4, 1, 2, 3, 5	1/2, 3/4, 1, 2, 3
LED4W25-050	50	16/3	4	112	2, 3, 5, 7.5	2, 3, 5
LED4W25-100	100	16/3	4	112	2, 3, 5, 7.5	2, 3, 5
LED4W25-150	150	16/3	4	112	2, 3, 5, 7.5	2, 3, 5
LED4W25-200	200	16/3	4	112	2, 3, 5, 7.5	2, 3, 5
LED4W25-250	250	16/3	4	112	2, 3, 5, 7.5	2, 3, 5
LED4W25-300	300	16/3	4	112	2, 3, 5, 7.5	2, 3, 5
LED4W25-400	400	16/3	4	112	2, 3, 5, 7.5	2, 3, 5
LED4W25-500	500	16/3	4	112	2, 3, 5, 7.5	2, 3, 5

*2, 3, & 5HP surface aerators will require a 6-light kit adapter for 4-light kits (part # 840306).

