



WATERGLOW LIGHTING

LEDC11 COMPOSITE LIGHTING

OVERVIEW


- Composite LED fixtures
- Colored lenses and caps
- Mounting brackets, hardware, & snap-on clips
- Saltwater compatible
- Packaged for easy installation and convenient shipping
- 2-year warranty

FIXTURES

- 120V, 1 phase power
- Ultrasonically welded thermoplastic fixtures
- 11-watt potted LED driver and board in each fixture
- Built-in thermal overload
- Clear plastic light window
- Rubber lens cap
- Set of colored lenses, including red, green, blue, and yellow
- IP68 connector
- Flex sleeving on each fixture
- Color temperature: 3,000K

POWER CABLE

- 3 wire (L, N, G)
- Integrated splitter to allow for single cord back to power source
- NEMA 5-15P plug
- 6' flex sleeving protection
- Optional Quick Disconnect available
- UL, CSA, & NEC approved underwater-rated cable

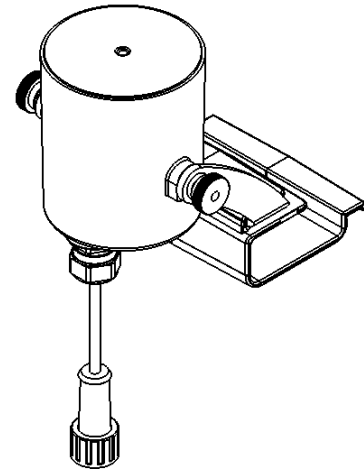

BRACKETS

- Coated stainless steel bracket
- Adjustable angling with thumb screws
- Includes hardware for mounting to snap-on clip
- 4-light kits include Universal bracket for mounting to non-Kasco brand floating fountains

SNAP-ON LIGHT CLIPS

- Molded thermoplastic attachment clips
- Easily snap onto light brackets and then onto molded float locations
- Allow for easy installation and removal of lights on Kasco floats

WATERGLOW LIGHTING

LEDC11 COMPOSITE LIGHTING

	Cord Length (feet)	Cord Gauge	Voltage / Phase / Hz	Fixtures	Watts per Fixture	Kit Wattage	Lumens per Fixture	Suggested HP Sizes
LED3C11-50	50	16/3	120 / 1 / 60	3	11	33	910	1/2 - 1HP
LED3C11-100	100	16/3	120 / 1 / 60	3	11	33	910	1/2 - 1HP
LED3C11-150	150	16/3	120 / 1 / 60	3	11	33	910	1/2 - 1HP
LED3C11-200	200	16/3	120 / 1 / 60	3	11	33	910	1/2 - 1HP
LED3C11-250	250	16/3	120 / 1 / 60	3	11	33	910	1/2 - 1HP
LED3C11-300	300	16/3	120 / 1 / 60	3	11	33	910	1/2 - 1HP
LED3C11-400	400	16/3	120 / 1 / 60	3	11	33	910	1/2 - 1HP
LED3C11-500	500	16/3	120 / 1 / 60	3	11	33	910	1/2 - 1HP
LED6C11-50	50	16/3	120 / 1 / 60	6	11	66	910	2 - 7.5HP
LED6C11-100	100	16/3	120 / 1 / 60	6	11	66	910	2 - 7.5HP
LED6C11-150	150	16/3	120 / 1 / 60	6	11	66	910	2 - 7.5HP
LED6C11-200	200	16/3	120 / 1 / 60	6	11	66	910	2 - 7.5HP
LED6C11-250	250	16/3	120 / 1 / 60	6	11	66	910	2 - 7.5HP
LED6C11-300	300	16/3	120 / 1 / 60	6	11	66	910	2 - 7.5HP
LED6C11-400	400	16/3	120 / 1 / 60	6	11	66	910	2 - 7.5HP
LED6C11-500	500	16/3	120 / 1 / 60	6	11	66	910	2 - 7.5HP
LED4C11-50	50	16/3	120 / 1 / 60	4	11	44	910	Non-Kasco
LED4C11-100	100	16/3	120 / 1 / 60	4	11	44	910	Non-Kasco
LED4C11-150	150	16/3	120 / 1 / 60	4	11	44	910	Non-Kasco
LED4C11-200	200	16/3	120 / 1 / 60	4	11	44	910	Non-Kasco
LED4C11-250	250	16/3	120 / 1 / 60	4	11	44	910	Non-Kasco
LED4C11-300	300	16/3	120 / 1 / 60	4	11	44	910	Non-Kasco
LED4C11-400	400	16/3	120 / 1 / 60	4	11	44	910	Non-Kasco
LED4C11-500	500	16/3	120 / 1 / 60	4	11	44	910	Non-Kasco

