



5.1JF FOUNTAIN

OVERVIEW

- Complete package includes motor unit, control panel, float with screens, mooring lines, cable, five interchangeable nozzles
- Total package Listed by ETL to UL/CSA standards
- Intake near surface allows for shallow operation
- Saltwater compatible
- Packaged for convenient shipping
- Optional lighting available

FLOAT


- UV-resistant polyethylene
- Single-piece float
- Series 300 stainless steel hardware
- Series 300 stainless steel top and bottom screen
- Three 50' braided nylon mooring ropes

FOUNTAIN COMPONENTS

- Custom thermoplastic impeller
- UV-resistant thermoplastic cone and fountain housing
- Stainless steel base plate
- Series 300 stainless steel hardware
- Five thermoplastic nozzles
- Twist on/off nozzles for easy pattern changes

POWER CABLE

- 3 wire (L1, L2, G)
- Quick Disconnect standard on 12+ AWG cords (otherwise optional)
- Stainless steel strain relief on 12+ AWG cords
- 6' protective stainless steel flex sleeving standard (optional for entire cord length)
- Cable is UL, CSA & NEC rated for underwater use

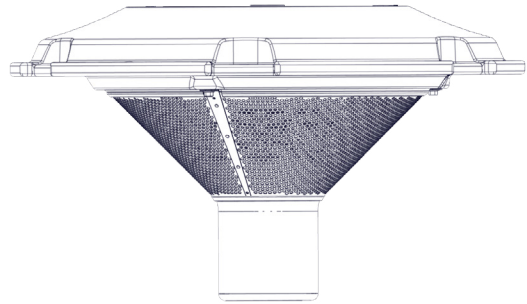

Dimensions

Float diameter: 47.5"

Unit height with float: 24"

MOTOR UNIT

- 5HP, 208-240Vac operating voltage range, single phase
- Class B insulation
- 1750 RPM
- Oil cooled
- Continuous duty rated
- 17mm top and 20mm bottom bearings
- Thermal overload protection
- Fully unitized heavy-duty carbon-ceramic mechanical seal
- Series 300 stainless steel can
- Cast stainless steel motor top
- Sacrificial anode installed on 316 stainless shaft

CONTROL PANEL

- UL Listed
- 3r/4x outdoor-rated thermoplastic enclosure
- 2 GFCI circuit breakers with 6mA ground fault protection
- Surge protector
- (2) 24-hour digital timers with battery backup
- 4-wire power required (L1, L2, N, G)

5.1JF FOUNTAIN

OVERVIEW

HP	Voltage / Phase / Hz	Running Amps	Lock Rotor Amps	Suggested Pond Size (SA)	Min. Depth of Operation (in.)
5	208-240V / 1 / 60	20	88	Up to 2.5*	26"

*Surface Acreage; also consider pond shape, depth, and oxygen demand.

MODEL SPECIFICATIONS


Model	Cord Length (ft.)	Cord Gauge
5.1JF100**	100	12/3
5.1JF150**	150	10/3
5.1JF200**	200	10/3
5.1JF250**	250	8/3
5.1JF300**	300	6/3
5.1JF400**	400	6/3
5.1JF500**	500*	6/3

*500' and longer cords available by custom order only.


**Ships motor freight only.



INCLUDED PATTERNS




Birch
24' H x 14' W




Spruce
31' H x 12' W




Redwood
32' H x 6' W

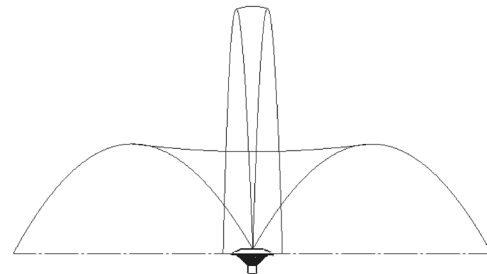

Linden
(Blue Nozzle)
24.5' H x 46' W

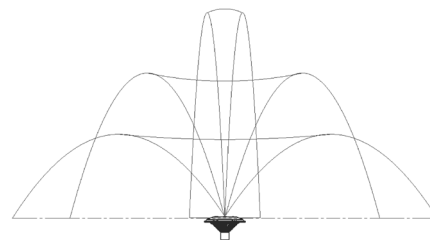

Balsam
(Blue Nozzle)
18' H x 34' W

NOTE  For additional patterns, ask about Premium Nozzles.

